


BS




Motore brushless sinusoidale 230Vac a 4 poli con resolver o encoder, in forma chiusa. Rotore con magneti NdFeB. □ 55 ÷ 88 mm.

	POWER	RPM	TORQUE S1	TORQUE S3
EUR	188 ÷ 880 W	4000	0,5 ÷ 2,3 Nm	1,5 ÷ 6,9 Nm
USA	1/4 ÷ 1.2 HP	4000	4.4 ÷ 20.4 in-lbs	13.3 ÷ 61 in-lbs

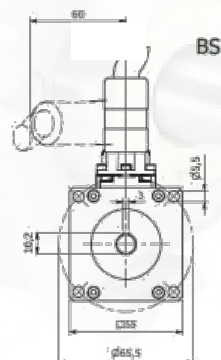

DBS

DBS-S3



Servomotore brushless con azionamento Integrato. □ 55 ÷ 88 mm.

	POWER	RPM	TORQUE S1	TORQUE S3
EUR	125 ÷ 630 W	3000	0,4 ÷ 2,0 Nm	0,8 ÷ 3,0 Nm
USA	1/6 ÷ 0.86 HP	3000	3.54 ÷ 17.7 in-lbs	7.1 ÷ 26.6 in-lbs

CANopen



Modbus

EtherCAT

EtherNet/IP

PROFINET

POWERLINK

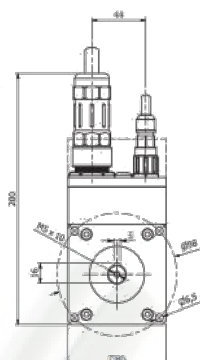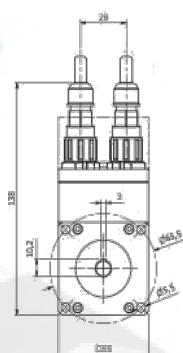

WDBSE



WDBSE-S3



Novità


Servomotore brushless con azionamento integrato e fieldbus wireless. □ 55 - 80 mm.

	POWER	RPM	TORQUE S1	TORQUE S3
EUR	125 ÷ 630 W	3000	0,4 ÷ 2,0 Nm	0,8 ÷ 3,0 Nm
USA	1/6 ÷ 7/8 HP	3000	3.54 ÷ 17.7 in-lbs	7.1 ÷ 26.6 in-lbs



PCEDBS

PCEDBS-S3



Servomotoriduttore brushless a vite senza fine con azionamento integrato e riduttore epicicloidale. □ 55 mm.

	POWER	RPM	TORQUE S1	TORQUE S3
EUR	125 ÷ 235 W	6,3 ÷ 90	8,8 ÷ 81 Nm	23,4 ÷ 135 Nm
USA	1/6 ÷ 1/3 HP	6.3 ÷ 90	78 ÷ 717 in-lbs	207 ÷ 1200 in-lbs

CANopen

Modbus

EtherCAT

EtherNet/IP

PROFINET

POWERLINK

